

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
REQUEST FOR FILING NATIONAL PHASE OF
PCT APPLICATION UNDER 35 U.S.C. 371 AND 37 CFR 1.494 OR 1.495To: Asst. Commissioner of Patents
Washington, D.C. 20231TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)Atty Dkt: PM 262375 | T297070US/PAK
M# | Client Ref.

From: Pillsbury Madison & Sutro LLP, IP Group:

Date: August 2, 1999This is a **REQUEST** for **FILING** a PCT/USA National Phase Application based on:

1. International Application <u>PCT/FI98/00946</u> <u>country code</u>	2. International Filing Date <u>4</u> <u>December</u> <u>1998</u> Day MONTH Year	3. Earliest Priority Date Claimed <u>5</u> <u>December</u> <u>1997</u> Day MONTH Year (use item 2 if no earlier priority)
--	--	--

4. Measured from the earliest priority date in item 3, this PCT/USA National Phase Application Request is being filed within:

(a) ☒ 20 months from above item 3 date (b) ☐ 30 months from above item 3 date,(c) Therefore, the due date (unextendable) is 8/5/995. Title of Invention A TRANSMISSION METHOD IN A RADIO SYSTEM ADJUSTING TRANSMISSION MOMENTS6. Inventor(s) PIIRAINEN, Olli

Applicant herewith submits the following under 35 U.S.C. 371 to effect filing:

7. ☒ Please immediately start national examination procedures (35 U.S.C. 371 (f)).8. ☐ A copy of the International Application as filed (35 U.S.C. 371(c)(2)) is transmitted herewith (file if in English but, if in foreign language, file only if not transmitted to PTO by the International Bureau) including:a. ☐ Request;b. ☐ Abstract;c. pgs. Spec. and Claims;d. sheet(s) Drawing which are ☐ informal ☐ formal of size ☐ A4 ☐ 11"9. ☒ A copy of the International Application has been transmitted by the International Bureau.

10. A translation of the International Application into English (35 U.S.C. 371(c)(2))

a. ☒ is transmitted herewith including: (1) ☒ Request; (2) ☒ Abstract;(3) 13 pgs. Spec. and Claims;(4) 2 sheet(s) Drawing which are:☐ informal☒ formal of size☒ A4☐ 11"b. ☐ is not required, as the application was filed in English.c. ☐ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.d. ☐ Translation statement attached (not required now).

11. ☒ **PLEASE AMEND** the specification before its first line by inserting as a separate paragraph:
 a. ☒ --This application is the national phase of international application PCT /FI98 /00946 filed December 4, 1998 which designated the U.S.--
 b. ☐ --This application also claims the benefit of U.S. Provisional Application No. 60/ _____, filed _____.
12. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., **before 18th month from first priority date above in item 3, are transmitted herewith (file only if in English) including:**
13. ☒ PCT Article 19 claim amendments (if any) have been transmitted by the International Bureau
14. ☐ Translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)), i.e., of **claim amendments** made before 18th month, is attached (**required by 20th month from the date in item 3 if box 4(a) above is X'd, or 30th month if box 4(b) is X'd, or else amendments will be considered canceled**).
15. **A declaration of the inventor** (35 U.S.C. 371(c)(4))
 a. ☐ is submitted herewith ☐ Original ☐ Facsimile/Copy
 b. ☒ is not herewith, but will be filed when required by the forthcoming PTO Missing Requirements Notice per Rule 494(c) if box 4(a) is X'd or Rule 495(c) if box 4(b) is X'd.
16. **An International Search Report (ISR):**
 a. Was prepared by ☐ European Patent Office ☐ Japanese Patent Office ☒ Other
 b. ☒ has been transmitted by the international Bureau to PTO.
 c. ☒ copy herewith (1 pg(s).) ☒ plus Annex of family members (1 pg(s).).
17. **International Preliminary Examination Report (IPER):**
 a. ☒ has been transmitted (if this letter is filed after 28 months from date in item 3) in English by the International Bureau with Annexes (if any) in original language.
 b. ☐ copy herewith in English.
 c.1 ☐ IPER Annex(es) in original language ("Annexes" are amendments made to claims/spec/drawings during Examination) including attached amended:
 c.2 ☐ Specification/claim pages # _____ claims # _____
 Dwg Sheets # _____
 d. ☐ Translation of Annex(es) to IPER (**required by 30th month due date, or else annexed amendments will be considered canceled**).
18. **Information Disclosure Statement** including:
 a. ☒ Attached Form PTO-1449 listing documents
 b. ☐ Attached copies of documents listed on Form PTO-1449
 c. ☒ A concise explanation of relevance of ISR references is given in the ISR.
19. ☐ **Assignment** document and Cover Sheet for recording are attached. Please mail the recorded assignment document back to the person whose signature, name and address appear at the end of this letter.
20. ☐ Copy of Power to IA agent.
21. ☐ **Drawings** (complete only if 8d or 10a(4) not completed): _____ sheet(s) per set: ☐ 1 set informal; ☐ 1 set formal of size ☐ A4 ☐ 11"
22. ☐ _____ (No.) **Verified Statement(s)** establishing "small entity" status under Rules 9 & 27
23. **Priority** is hereby claimed under 35 U.S.C. 119/365 based on the priority claim and the certified copy, both filed in the International Application during the international stage based on the filing in (country) FINLAND of:

	Application No.	Filing Date		Application No.	Filing Date
(1)	<u>974446</u>	<u>Dec. 5, 1997</u>	(2)	_____	_____
(3)	_____	_____	(4)	_____	_____
(5)	_____	_____	(6)	_____	_____

 a. ☒ See Form PCT/IB/304 sent to US/DO with copy of priority documents. If copy has not been received, please proceed promptly to obtain same from the IB.
 b. ☐ Copy of Form PCT/IB/304 attached.

24. Attached:

510 Rec'd PCT/PTO 02 AUG 1999

25. Preliminary Amendment:

25.5 Per Item 17.c3, **cancel original** pages #_____, claims #_____, Drawing Sheets #

26. Calculation of the U.S. National Fee (35 U.S.C. 371 (c)(1)) and other fees is as follows:

based on amended claim(s) per above item(s) ☐ 12, ☐ 14, ☐ 17, ☐ 25, ☐ 25.5 (hilit)

					Fee Code (lg/sm entity) (see box 22)
Total Effective Claims	minus 20 =	0	x \$18/\$9	= \$0	966/967
Independent Claims	minus 3 =	0	x \$78/\$39	= \$0	964/965
If any proper (ignore improper) Multiple Dependent claim is present,			add\$260/\$130	+0	968/969

BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(4)): →→BASIC FEE REQUIRED, NOW→→→

A. If country code letters in item 1 are not "US", "BR", "BB", "TT", "MX", "IL", "NZ", or "IN"

See item 16 re:

1. Search Report was <u>not prepared</u> by EPO or JPO -----	add\$970/\$485		960/961
2. Search Report was prepared by EPO or JPO -----	add\$840/\$420	+970	970/971

SKIP B, C, D AND E UNLESS country code letters in item 1 are "US", "BR", "BB", "TT", "MX", "IL", "NZ", or "IN"

→ <input type="checkbox"/> B. If USPTO did not issue <u>both</u> International Search Report (ISR) <u>and</u> (if box 4(b) above is X'd) the International Examination Report (IPER), -----	add\$970/\$485	+	960/961
→ <input type="checkbox"/> C. If USPTO issued ISR but not IPER (or box 4(a) above is X'd), -----	add\$760/\$380	+	958/959
→ <input type="checkbox"/> D. If USPTO issued IPER but IPER Sec. V boxes <u>not all</u> 3 YES, -----	add\$670/\$335	+	956/957
→ <input type="checkbox"/> E. If international preliminary examination fee was paid to USPTO and Rules 492(a)(4) and 496(b) <u>satisfied</u> (IPER Sec. V <u>all</u> 3 boxes YES for <u>all</u> claims), -----	add \$96/\$48	+	962/963

27. SUBTOTAL =	\$970	
28. If Assignment box 19 above is X'd, add Assignment Recording fee of ----\$40	+0	581
29. Attached is a check to cover the -----	TOTAL FEES	\$970

Our Deposit Account No. 03-3975

Our Order No. 60256

C#

262375

M#

CHARGE STATEMENT: The Commissioner is hereby authorized to charge any fee specifically authorized hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and which may be required under Rules 16-18 and 492 (missing or insufficient fee only) now or hereafter relative to this application and the resulting Official document under Rule 20, or credit any overpayment, to our Account/Order Nos. shown above for which purpose a duplicate copy of this sheet is attached.

This CHARGE STATEMENT does not authorize charge of the issue fee until/unless an issue fee transmittal form is filedPillsbury Madison & Sutro LLP
Intellectual Property Group

1100 New York Avenue, N.W.
Ninth Floor East Tower
Washington, D.C. 20005-3918
Tel: (202) 861-3000
Atty/Sec: BXS/mhn

By: Atty: Brian Siritzky

Sig:

Reg. No. 37497

Fax: (202) 822-0944
Tel: (202) 861-3702

NOTE: File in duplicate with 2 postcard receipts (PAT-103) & attachments.

510 Rec'd FICT/PTO 02 AUG 1999

A TRANSMISSION METHOD AND RADIO SYSTEM ADJUSTING TRANSMISSION MOMENTS

FIELD OF INVENTION

The invention relates to a transmission method used in a radio system that comprises at least one base station and a number of subscriber terminals, at least two of which transmit access bursts to one and the same base station, the access burst activating between a subscriber terminal and a base station a connection that is established by a signal that is of a certain frequency and is sent in time slots.

BACKGROUND OF INVENTION

Indoors, for example in office buildings, base stations suited particularly for the place concerned are used. The base stations receive and transmit a signal by means of RF heads. The RF heads of the base stations are positioned about the building so that the coverage areas of the base stations cover the whole building insofar as possible. In practice the RF heads comprise, for example, transceiver antenna units.

When an indoors radio system is designed, particular attention must be paid to matters affecting the propagation of the signal. The walls and other structures in the building may attenuate the signal very rapidly. The rapid attenuation of the signal may require a very dense base station network, whereby the RF heads are also relatively close to one another. Because of the large number of base stations, the system is relatively expensive to build.

The RF heads are positioned in suitable places about the building, whereby a connection can be established between a subscriber terminal and a base station. Because of the large number of RF heads, it has been possible to reduce the distance between the subscriber terminal and the RF head, which also reduces the delay from the RF head to the subscriber terminal.

The number of RF heads is normally larger than the number of base station transmitters. In addition, the number of transmitters is usually larger than the number of radio frequencies used at the base station. Let us assume that the subscriber terminals are connected with different RF heads of one and the same base station by means of a signal transmitted by them. If the subscriber terminals establish a connection with the base station by means of signals of the same frequency, interference may occur between the RF heads. The occurrence of interference is even more likely if the signals are transmitted using the same frequencies in the same time slots. The RF heads

receive the interference signal substantially simultaneously with the information signal, whereby the information signal is difficult to separate from the interference signal.

Radio systems typically employ a known training sequence, which
5 is added to a burst to be transmitted. The training sequence is used to estimate the impulse response of the received signal. If both subscriber terminals use the same training sequence, it is difficult for the receiver of the base station to separate the information signals from the interference signals. In practice this means that the receiver is not able to separate the interference
10 signal from the impulse response of the information signal estimated by it, whereby the quality of the signal is impaired. The problem can be solved by using signals of different frequencies on the connections, but the number of frequencies that can be used is, however, limited. If only signals of different frequencies are transmitted in the radio system, the costs of building the radio
15 system are high.

In so-called office base stations intended for indoors, relatively low signal transmission power is used, since the RF heads are located in the vicinity of people. A sufficiently reliable estimate, however, is not achieved with the previously known methods because of the low transmission power, and
20 this impairs the performance of the receiver.

BRIEF DESCRIPTION OF INVENTION

The object of the invention is to provide a transmission method and a radio system in which the above problems are solved. The object is achieved with a method described in the introduction, the method being
25 characterized in that when the subscriber terminal is commanded to send the base station a signal that employs a time slot and frequency already used by another subscriber terminal, the subscriber terminal is sent a command to adjust the transmission moment of the signal so that the base station receives the transmitted signals at different moments.

30 The invention also relates to a radio system that comprises at least one base station and a number of subscriber terminals, at least two of which transmit access bursts to one and the same base station, the access burst activating between a subscriber terminal and a base station a connection that is established by a signal that is of a certain frequency and is sent in time
35 slots.

The radio system is characterized by comprising transmission means, which command the subscriber terminal to send the base station a signal that employs a time slot and frequency already used by another subscriber terminal, and adjustment means, which on the basis of the command sent by the transmission means adjust the transmission moment of the signal to be transmitted to the base station so that the base station receives the transmitted signals at different moments.

The preferred embodiments of the invention are claimed in the dependent claims.

The basic idea of the invention is that the signals to be transmitted are delayed, if necessary, whereby an interference signal and an information signal can be separated from each other.

Several advantages are achieved with the transmission method and radio system of the invention. Since the signals transmitted at the same frequency can be separated after the signals have been received, the radio system can be implemented using a minimal number of different radio frequencies. The signals by means of which the subscriber terminals communicate simultaneously with adjacent RF heads can use the same frequency. This reduces costs when the radio system is built: for example, the number of transmitters can be reduced. In addition, signals can be received even at very low signal reception levels.

BRIEF DESCRIPTION OF FIGURES

In the following the invention will be described in greater detail in connection with preferred embodiments and with reference to the attached drawings, in which

Fig. 1 is a general view of a radio system in which a method of the present invention is used,

Fig. 2 is a general view of a structure of a transceiver used in the radio system of the invention,

Fig. 3 shows a radio system of the invention,

Fig. 4 is a more detailed view of the radio system of the invention, and

Fig. 5 shows a normal burst of the GSM system.

DETAILED DESCRIPTION OF INVENTION

Fig. 1 is a general view of a radio system in which a method of the present invention is used. The radio system comprises base stations 100, a base station controller 300 and subscriber terminals 201-203. The base stations are connected to the base station controller 300, for example, via a transmission line. The subscriber terminals establish a connection to the base stations by means of signals transmitted by them. The base station 100 usually forwards the signal transmitted by the subscriber terminal, for example, to another subscriber terminal. In practice, the base station 100 and the subscriber terminal 201-203 operate as transceivers.

Fig. 2 is a general view of a structure of a transceiver used in the radio system of the invention. The base station and the subscriber terminal comprise, in principle, the structures shown in Fig. 2. The transceiver comprises an antenna 108, which operates as a transceiver antenna. In addition, the transceiver comprises radio frequency parts 112, 124, a modulator 123, a demodulator 113 and a control block 120.

The transceiver further comprises an encoder 122 and a decoder 114. The control block 120 controls the operation of the above transceiver blocks. The radio frequency parts 112 convert the radio frequency signal obtained from the antenna 108 to an intermediate frequency. The intermediate-frequency signal is supplied to the demodulator 112, which demodulates the signal. The demodulated signal is subsequently decoded in the decoder 114.

The encoder 112 receives a signal and transmits the coded signal to the modulator 123. The coding in the encoder 122 is implemented, for example, as convolution coding. The encoder 122 also, for example, encrypts the signal. Further, the encoder 122 interleaves the bits or bit sequences of the signal. The convolution-coded signal is then supplied to the modulator 123, which modulates the signal. The signal is then supplied to the radio frequency parts 124, which convert the modulated signal into a radio frequency signal. The radio frequency parts 124 transmit the signal by means of the antenna 108 onto the radio path.

Fig. 3 shows a radio system of the present invention. The radio system comprises a number of RF heads 161-167 and two subscriber terminals 201, 202. The radio system is particularly suitable for indoors, for example, for office buildings. In practice, the RF heads are positioned in the

rooms so that the signals transmitted via the RF heads cover the whole building insofar as possible. The radio system also comprises four transmitters 141-144, means 130, and connection means 150. In practice, the transmitters 141-144, means 130 and connection means 150 are located at the base station 100. In the radio system illustrated by the figure, the RF heads 161-167 are connected to the connection means 150 via a cable 170. The connection means 150 are further connected to means 130 via transmitters 141-144, means 130 providing an Abis interface between the base station 100 and the base station controller 300.

The base station 100 and the subscriber terminal 201, 202 are connected with each other by means of signals. In the radio system illustrated by the figure, subscriber terminal 201 is connected with RF head 166 by signal 211. Subscriber terminal 202 is connected with RF head 167 by signal 212. In the radio system of the figure, RF heads 166, 167 are adjacent RF heads, located relatively close to each other.

The subscriber terminal activates the establishment of the connection with the base station 100 by means of access bursts transmitted by it. The base station 100 receives the access bursts on a RACH channel (RACH = Random Access). After the reception of the access bursts, the base station controller 300 controlling the base station 100 of the radio system sends the base station 100 a signal activating the channel. A time division multiple access TDMA method is preferably used in the radio system, whereby the signals establishing the connection are transmitted in time slots. The number of simultaneous connections is increased in practice by transmitting signals at different frequencies.

Fig. 4 shows the radio system of the invention in greater detail. The radio system comprises transmission means 101 and correlation means 102. The transmission means 101 transmit commands to the subscriber terminal, and on the basis of the commands the subscriber terminal changes the frequency of the signal transmitted by it. The correlation means 102 form impulse responses from the signals received by the base station 100. In addition, the radio system comprises data storage means 103, which store information about the radio frequencies used in the radio system. In the radio system illustrated by the figure, means 101, 102, 103 communicate with the base station 100. In practice, means 101, 102, 103 are located at the base station 100.

The subscriber terminal 201 of the figure comprises adjustment means 205, which adjust the transmission moment of the signal transmitted by the subscriber terminal 201. The subscriber terminals transmit a training sequence in conjunction with the signals to the base station 100. On the basis of the training sequence received by the base station 100, the correlation means 102 connected with the base station separate from each other at least two signals that are of the same frequency and have been received from the same time slot.

With reference to Fig. 3, let us first assume that the number of radio frequencies used at the base station 100 is smaller than the number of the transmitters 141-144 contained in the base station 100. The figure shows that the subscriber terminals 201, 202 communicate with one and the same base station 100 via different RF heads. Let us further assume that the subscriber terminals use a similar training sequence, by which the impulse response of the received signal is estimated. If the subscriber terminals use the same frequency and time slot, interference may occur between the RF heads 166, 167. Let us assume that subscriber terminal 201 in the radio system produces an interference signal 311 that propagates to RF head 167. Let us further assume that subscriber terminal 202 produces an interference signal 312 that propagates to RF head 166.

The correlation means 102 select, on the basis of the correlation, the signal with the best quality or for example the highest energy, and the signal is then used as an actual connection-establishing signal. The signals generated on the basis of the correlation are also placed in so-called windows. The correlation means 102 compare the summed energies of the impulse responses of the signals placed in the windows, whereby the interference signals received by the RF heads can be detected. Also, the subscriber terminal producing the interference signal can be detected.

The subscriber terminal 201 can communicate with a plural number of RF heads simultaneously. On the basis of the correlation, the signals that have been received by the RF heads and have been transmitted by one and the same subscriber terminal can be detected. When the subscriber terminal 201 roams in the radio system, the base station 100 instructs the subscriber terminal 201, if necessary, to change the current RF head for another RF head. The change can be based, for example, on a correlation result. If the subscriber terminal 201 is connected with several RF heads, then the

subscriber terminal 201 preferably establishes a connection with the RF head from which the base station 100 has received the signal with the greatest power.

In the radio system illustrated by Fig. 3, the RF heads 166, 167 receive an interference signal substantially simultaneously with an information signal. Since both subscriber terminals 201, 202 use the same training sequence, it is difficult for the base station 100 to separate the information signals from the interference signals. In practice this means that the receiver of the base station 100 is not able to separate the interference signal from the impulse response of the information signal estimated by it, whereby the quality of the signal is impaired.

Let us assume that the transmission means 101 command the subscriber terminal to send the base station 100 a signal having a time slot and frequency that are already used by another subscriber terminal and that are stored in the storage means 103. The adjustment means 205 then adjust the transmission moment of the signal to be transmitted to the base station 100. The adjustment means 205 adjust the transmission moment preferably before an actual connection is established.

Fig. 5 illustrates, by way of example, a normal burst of the GSM system, the burst comprising so-called tail bits in two blocks 401, 407. There are six tail bits in all. The actual data is coded in two blocks 402, 406. Each block contains 57 data bits. The burst also comprises two 1-bit blocks 403, 405, which are used to detect signaling. The burst further comprises a previously known training sequence 404 in the middle of the burst. Further, the burst comprises a 8.25-bit guard period. In a normal burst the training sequence is 26 bits long. In the known solutions, such as in the GSM, the impulse response is estimated by cross-correlating the received signal samples with the known training sequence. From the 26-bit long training sequence, 16 bits are used to estimate each impulse response tap.

The adjustment means 205 use the tail bits 401 at the beginning of the burst to adjust the transmission moment of the signal. The guard period 408 at the end of the burst is also used to adjust the burst. The burst thus comprises exactly 11.25 bits that can be used in the adjustment where necessary. The adjustment means 205 thus delay or advance the transmission moment of the signal by substantially at most an 11-bit period. The adjustment of the signal to be transmitted allows the training sequences to

be received at different moments at the base station 100, whereby the signals transmitted at the same frequency and in the same time slot can be separated at the base station 100 by means of correlation. If the signal transmitted by the subscriber terminal interferes too much with a signal transmitted by another subscriber terminal, the transmission means 101 command the interfering subscriber terminal to change the signal transmission frequency.

In the radio system illustrated by the figure, the signals transmitted onto the radio path arrive at the receiver fairly rapidly, since the distance of the subscriber terminal from the RF head of the base station 100 is short. This means that the delay of the signal on the radio path is short. The short delay allows the estimated impulse response to be limited, for example, to a length of 3 or 4 bits. In practice the correlation means 102 limit the impulse responses to substantially 3 bits. If the adjustment means 205 adjust the timing of the subscriber terminal 201, 202, then the base station 100 can receive the signal, for example, at a delay of 4 bits, whereby the different impulse responses do not yet interleave. The adjustment means 205 thus adjust the transmission moments of the signals so that the base station 100 receives the signals transmitted by the subscriber terminal at different moments.

As stated above, the signals received by the base station 100 can be measured, for example, for energy. That signal received by the RF head 161-167 whose impulse response has the highest energy is defined on the basis of the measurement. The signals received by the RF heads 161-167 can also be compared such that the summed energies of the correlation taps of a desired signal are compared with the summed energies of the correlation taps of an interference signal. The following formula (1) is used to estimate the ratio of the summed energies:

$$(1) \quad \text{estim}\left(\frac{C}{I}\right) = \frac{\sum_i |h_i|^2}{\sum_j |h_j|^2}$$

where

C is the strength of an information signal,

I is the strength of an interference signal,

h_i is the impulse response of a desired signal at an instant i,

h_j is the impulse response of the interference signal at an instant j.

- Since the impulse responses of the desired signal and the interference signal are known, a so-called joint detection method can be used, and this further improves the performance of the receiver. The joint detection method, for example a JMLSE method, can be used, for example, to improve the bit error ratio of the signal.
- 5

Although the invention is described above with reference to the example illustrated in the attached drawings, it is to be understood that the invention is not limited thereto but can be varied in many ways within the scope of the inventive idea disclosed in the attached claims.

CLAIMS

1. A transmission method used in a radio system that comprises at least one base station (100) and a number of subscriber terminals (201-203), at least two of which transmit access bursts to one and the same base station, the access burst activating between a subscriber terminal and a base station a connection that is established by a signal that is of a certain frequency and is sent in time slots, **characterized** in that when the subscriber terminal is commanded to send the base station a signal that employs a time slot and frequency already used by another subscriber terminal, the subscriber terminal is sent a command to adjust the transmission moment of the signal so that the base station receives the transmitted signals at different moments.
2. A method as claimed in claim 1, **characterized** in that the transmission moment is adjusted before an actual connection is established.
3. A method as claimed in claim 1, **characterized** in that a command is sent to delay the transmission moment of the signal.
4. A method as claimed in claim 1, **characterized** in that a command is sent to advance the transmission moment of the signal.
5. A method as claimed in claim 1, **characterized** in that a command is sent to delay the transmission moment of the signal by substantially at most an 11-bit period.
6. A method as claimed in claim 1, **characterized** in that a command is sent to advance the transmission moment of the signal by substantially at most an 11-bit period.
7. A method as claimed in claim 1, **characterized** in that the transmission moment of the signal is adjusted by at most the tail bits at the beginning of the burst and the guard period at the end of the burst.
8. A method as claimed in claim 1, **characterized** in that impulse responses are formed from the signals received by the base station, the impulse responses being defined to have a length of a minimum of substantially 3 bits.
9. A method as claimed in claim 1, **characterized** in that at least two signals of the same frequency are separated from each other, the signals having been received by the base station from one and the same time slot.
10. A method as claimed in claim 9, **characterized** in that

the signals are separated by means of training sequences of signals received at different moments.

11. A method as claimed in claim 1, **characterized** in that the signals received by the base station are correlated and, on the basis of the correlation, the signal with the best quality and for example the highest energy is selected, and the signal is then used as a connection-establishing signal.

12. A method as claimed in claim 1, **characterized** in that the signals received by the base station are correlated by means of a training sequence, the signals formed on the basis of the correlation are placed in windows, and the summed energies of the impulse responses of the signals placed in the windows are compared.

13. A method as claimed in claim 1, **characterized** in that the subscriber terminal is commanded to change the signal transmission frequency, if the signal transmitted by the subscriber terminal interferes with a signal transmitted by another subscriber terminal.

14. A method as claimed in claim 1, **characterized** in that the frequencies used in different signals are predetermined.

15. A method as claimed in claim 1, **characterized** in that the signals are transmitted by a time division multiple access TDMA method.

16. A method as claimed in claim 1, **characterized** in that the method is particularly suited for radio systems used, for example, in offices.

17. A radio system comprising at least one base station (100) and a number of subscriber terminals (201-203), at least two of which transmit access bursts to one and the same base station, the access burst activating between a subscriber terminal and a base station a connection that is established by a signal of a certain frequency sent in time slots, **characterized** in that the radio system comprises

transmission means (101), which command the subscriber terminal to send the base station (100) a signal that employs a time slot and frequency already used by another subscriber terminal, and

adjustment means (205), which on the basis of the command sent by the transmission means (101) adjust the transmission moment of the signal to be transmitted to the base station (101) so that the base station (101) receives the transmitted signals at different moments.

18. A radio system as claimed in claim 17, **characterized** in that the adjustment means (205) adjust the transmission moment before an actual connection is established.

19. A radio system as claimed in claim 17, **characterized** in that the transmission means (101) send a command that delays the transmission moment of the signal.

20. A radio system as claimed in claim 17, **characterized** in that the transmission means (101) send a command that advances the transmission moment of the signal.

21. A radio system as claimed in claim 17, **characterized** in that the transmission means (101) send a command that delays the transmission moment of the signal by substantially at most an 11-bit period.

22. A radio system as claimed in claim 17, **characterized** in that the transmission means (101) send a command that advances the transmission moment of the signal by substantially at most an 11-bit period.

23. A radio system as claimed in claim 17, **characterized** in that the adjustment means (205) adjust the transmission moment of the signal by at most the tail bits at the beginning of the burst and the guard period at the end of the burst.

24. A radio system as claimed in claim 17, **characterized** in that the adjustment means (205) are located in a subscriber terminal.

25. A radio system as claimed in claim 17, **characterized** in that the radio system comprises correlation means (102) for forming impulse responses from the signals received by the base station, the correlation means (102) defining the impulse responses so that they have a length of a minimum of substantially 3 bits.

26. A radio system as claimed in claim 17, **characterized** in that the radio system comprises correlation means (102) that, on the basis of the training sequences accompanying the signals transmitted by the subscriber terminal, separate from each other at least two signals that have the same frequency and have been received from the same time slot.

27. A radio system as claimed in claim 17, **characterized** in that the radio system comprises correlation means (102) that correlate the signals received by the base station and select, on the basis of the correlation, the signal with the best quality or for example the highest energy, and the signal is then used as an actual connection-establishing signal.

28. A radio system as claimed in claim 17, **characterized** in that the radio system comprises correlation means (102) that correlate the signals received by the base station by means of training sequences, and that place the signals formed on the basis of the correlation in windows, and that
5 compare the summed energies of the impulse responses of the signals placed in the windows, whereby the interference signals and the subscriber terminal producing the interference signal can be detected.



29. A radio system as claimed in claim 17, **characterized** in that the radio system comprises correlation means (102) that correlate the
10 signals received by the base station and detect, on the basis of the correlation, the signals interfering with the reception of the signal.




30. A radio system as claimed in claim 17, **characterized** in that the transmission means (101) command the subscriber terminal to change the signal transmission frequency, if the signal transmitted by the subscriber
15 terminal interferes too much with a signal transmitted by another subscriber terminal.

31. A radio system as claimed in claim 17, **characterized** in that the radio system comprises storage means (103), which store information about the frequencies already used in different signals.

32. A radio system as claimed in claim 17, **characterized** in that a time division multiple access TDMA method is used in the radio system.
20

33. A radio system as claimed in claim 17, **characterized** in that the base station (100) of the radio system is a so-called office base station.

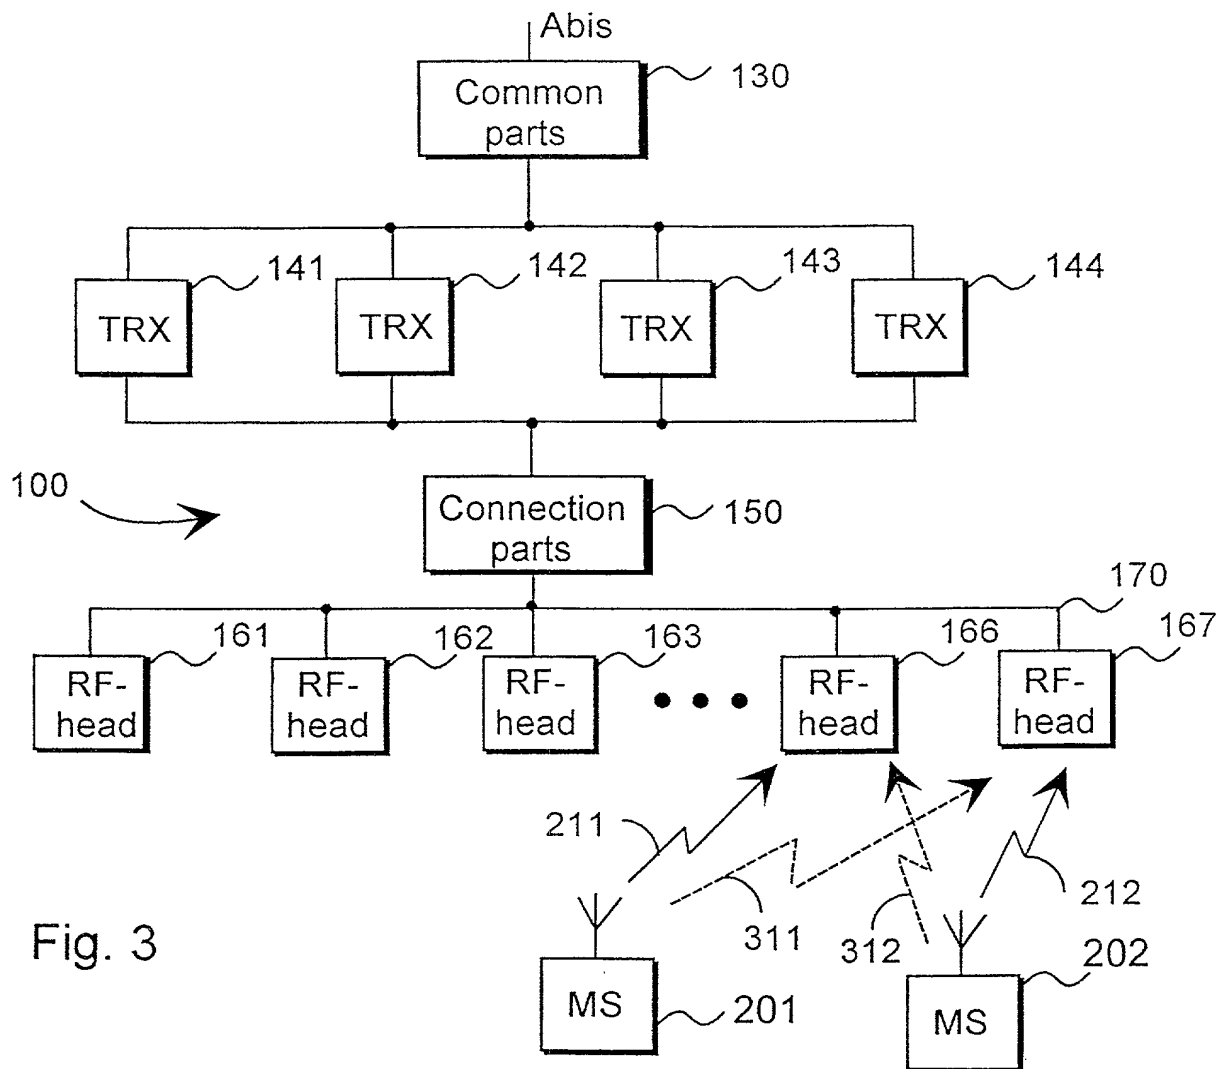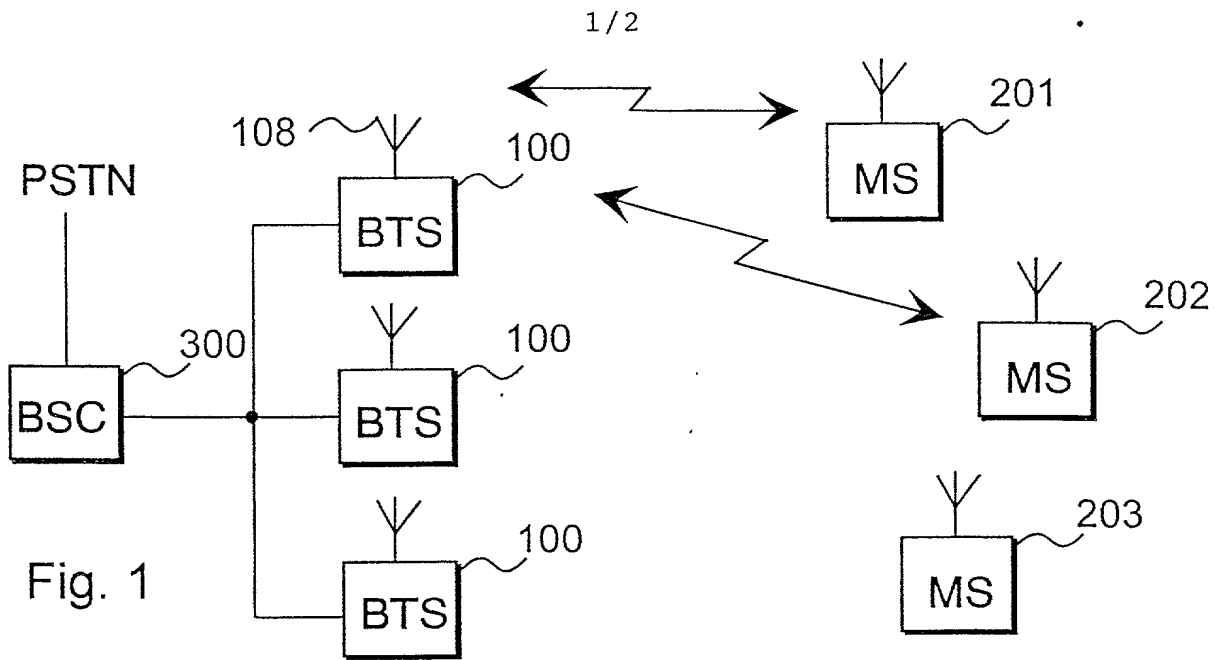

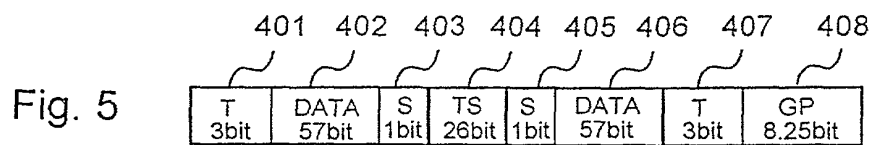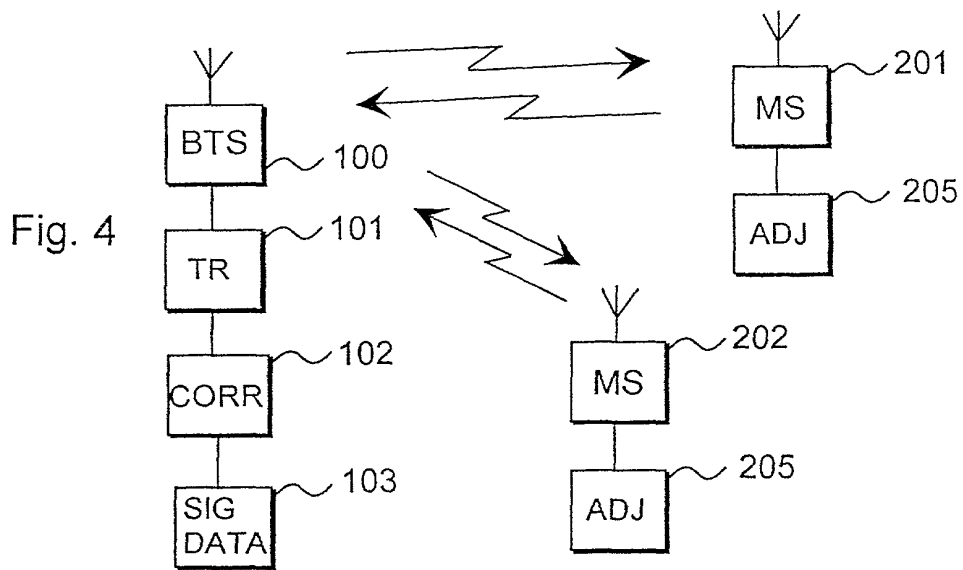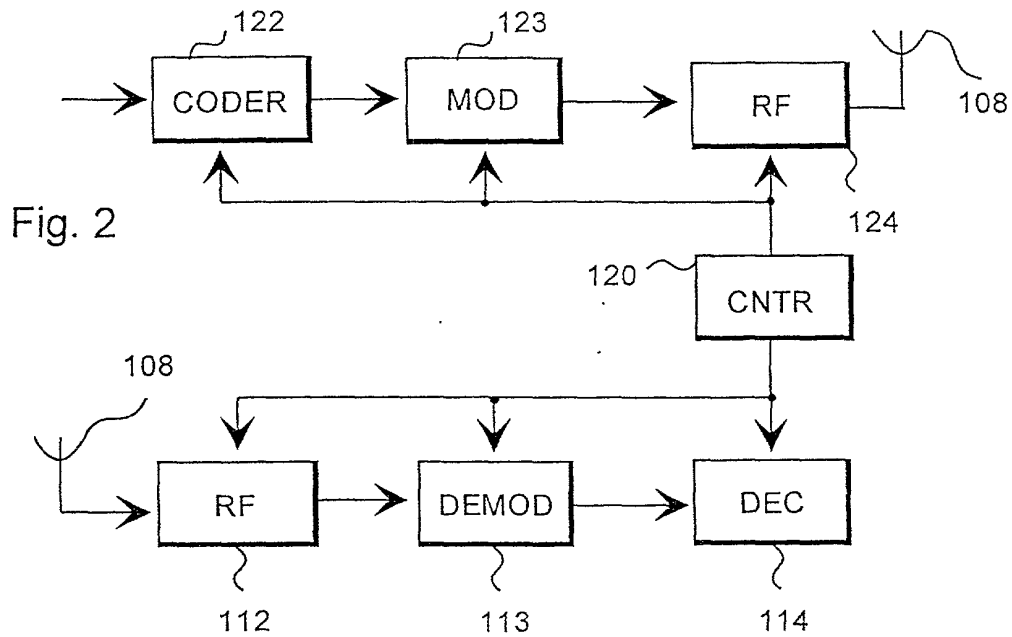

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the INVENTION ENTITLED

A transmission method in a radio system adjusting transmission moments

the specification of which (CHECK applicable BOX(ES))

X -> [] is attached hereto.

BOX(ES) -> [] was filed on _____ as U.S. Application No. 0 / _____

-> [X] was filed as PCT International Application No. PCT/ FI98/ 00946 on 4 December 1998

-> and (if U.S. or PCT application amended) was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56. I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing date of this application:

PRIOR FOREIGN APPLICATION(S)			Date first Laid- open or Published	Date Patented or Granted	Priority Claimed Yes No
Number	Country	Day/MONTH/Year Filed			
974446	Finland	5 December 1997			X

I hereby claim domestic priority benefit under 35 U.S.C. 119/120/365 of the indicated United States applications listed below and PCT international applications listed above or below and, if this is a continuation-in-part (CIP) application, insofar as the subject matter disclosed and claimed in this application is in addition to that disclosed in such prior applications, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in 37 C.F.R. 1.56 which became available between the filing date of each such prior application and the national or PCT international filing date of this application:

PRIOR U.S. PROVISIONAL, NONPROVISIONAL AND/OR PCT APPLICATION(S)		Status	Priority Claimed Yes No
Application No. (series code/serial no.)	Day/MONTH/Year Filed	pending, abandoned, patented	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint Pillsbury Madison & Sutro LLP, Intellectual Property Group, 1100 New York Avenue, N.W., Ninth Floor, East Tower, Washington, D.C. 20005-3918, telephone number (202) 861-3000 (to whom all communications are to be directed), and the below-named persons (of the same address) individually and collectively my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and with the resulting patent, and I hereby authorize them to delete names/numbers below of persons no longer with their firm and to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/ organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct the above Firm and/or a below attorney in writing to the contrary.

Paul N. Kokulis	16773	David W. Brinkman	20817	Michelle N. Lester	32331	Ruth N. Morduch	31044
Raymond F. Lippitt	17519	George M. Sirilla	18221	G. Paul Edgell	24238	Richard H. Zaitlen	77248
G. Lloyd Knight	17698	Donald J. Bird	25323	Lynn E. Eccleston	35861	Roger R. Wise	31204
Carl G. Love	18781	Peter W. Gowdey	25872	David A. Jakopin	32995	Jay M. Finkelstein	21082
Edgar H. Martin	20534	Dale S. Lazar	28872	Mark G. Paulson	30793	Anita M. Kirkpatrick	32617
William K. West, Jr.	22057	Glenn J. Perry	28458	Timothy J. Klima	34852	Michael R. Dzwonczyk	36787
Kevin E. Joyce	20508	Kendrew H. Colton	30368	Stephen C. Glazier	31361		
Edward M. Prince	22429	Paul E. White, Jr.	32011	Paul F. McQuade	31542		

1. INVENTOR'S SIGNATURE: _____ Date 31.02.1999

Inventor's Name (typed) Olli PIIRAINEN Finland
First Middle Initial Family Name Country of Citizenship

Residence (City) Oulu (State/Foreign Country) Finland
Post Office Address (Include Zip Code) Pikisaarentie 1 E 11, FIN-90100 Oulu, Finland

2. INVENTOR'S SIGNATURE: _____ Date _____

Inventor's Name (typed) _____
First Middle Initial Family Name Country of Citizenship

Residence (City) _____ (State/Foreign Country) _____
Post Office Address (Include Zip Code) _____

3. INVENTOR'S SIGNATURE: _____ Date _____

Inventor's Name (typed) _____
First Middle Initial Family Name Country of Citizenship

Residence (City) _____ (State/Foreign Country) _____
Post Office Address (Include Zip Code) _____

(FOR ADDITIONAL INVENTORS, check box [] and attach sheet (PAT-116.2) for same information for each re signature, name, date, citizenship, residence and address.)